


# HEART WALL HOOK

MATERIAL 1/4 x 3/4 x 18 HR

LAYOUT - 6 AND 10 INCH MARKS ON ANVIL

PUNCH - HEAT TO YELLOW HEAT. HOT PUNCH THROUGH AT 10 INCH FROM END. HAMMER PUNCH INTO METAL UNTIL ALMOST THROUGH. SOUND WILL CHANGE. FLIP MATERIAL OVER AND PUNCH THROUGH OVER PRITCHEL IN ANVIL. KEEP PUNCH COOL. WATCH FOR MUSH ROOMING

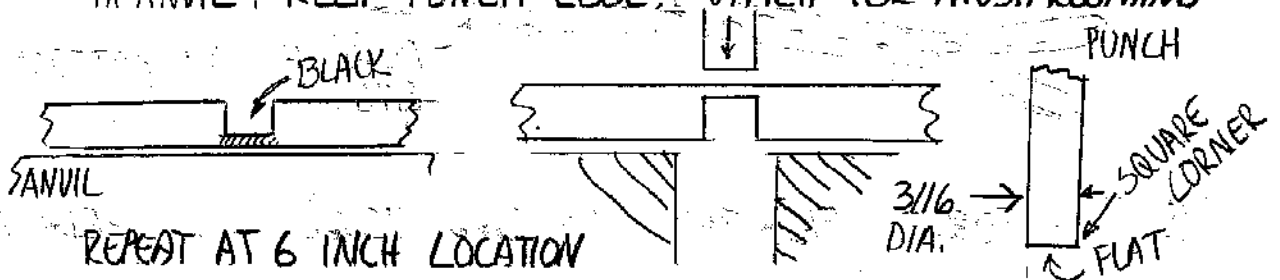


## SLIT

- HEAT END CLOSEST TO HOLE TO YELLOW HEAT. USE HOT CUT CHISSEL TO CUT TO POINT 1 INCH FROM HOLE.  
FIRST STEP - CUT ENTIRE LENGTH BUT NOT THROUGH  
2ND STEP - USE CUTTING PLATE OF SOFT STEEL TO PROTECT ANVIL. CUT THROUGH, FILE RAG EDGE




## TAPER


- FORGE TO EVEN UP SIDES. FORM SHORT TAPER AT TIP WORK ONE SIDE AT A TIME.

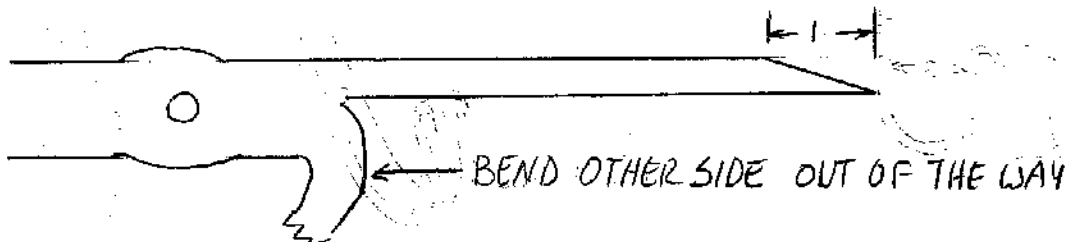

BEND - FORGE HEART SHAPE ON HORN OF ANVIL  
WORK ONE SIDE AT A TIME.  
STRIVE FOR PLEASING SHAPE

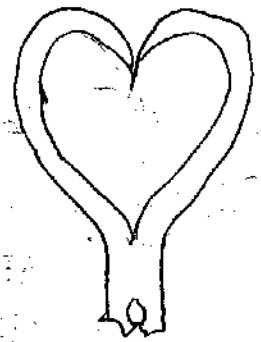

TEXTURE - LIGHTLY HAMMER EDGE ON FRONT SIDE  
TO BREAK MACHINE EDGES.

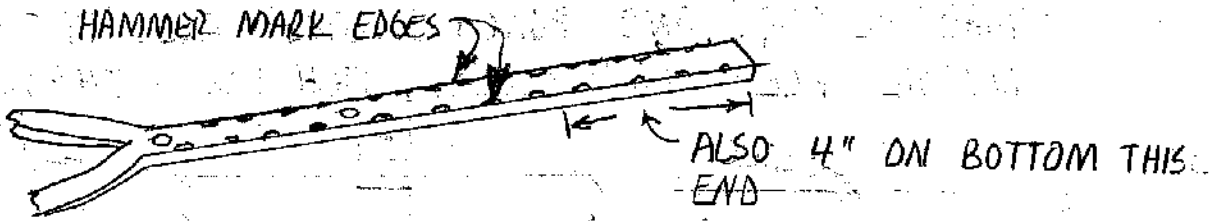

HEAT - FORGE FISH TAIL ON END USING CROSS PEIN HAMMER



BEND - SCROLL FISH TAIL END AND BEND HOOK  
TO COMPLETE

STRAIGHTEN AND APPLY FINISH

